


HDPE drainage channel Neo 150H (150/150) with flat edges

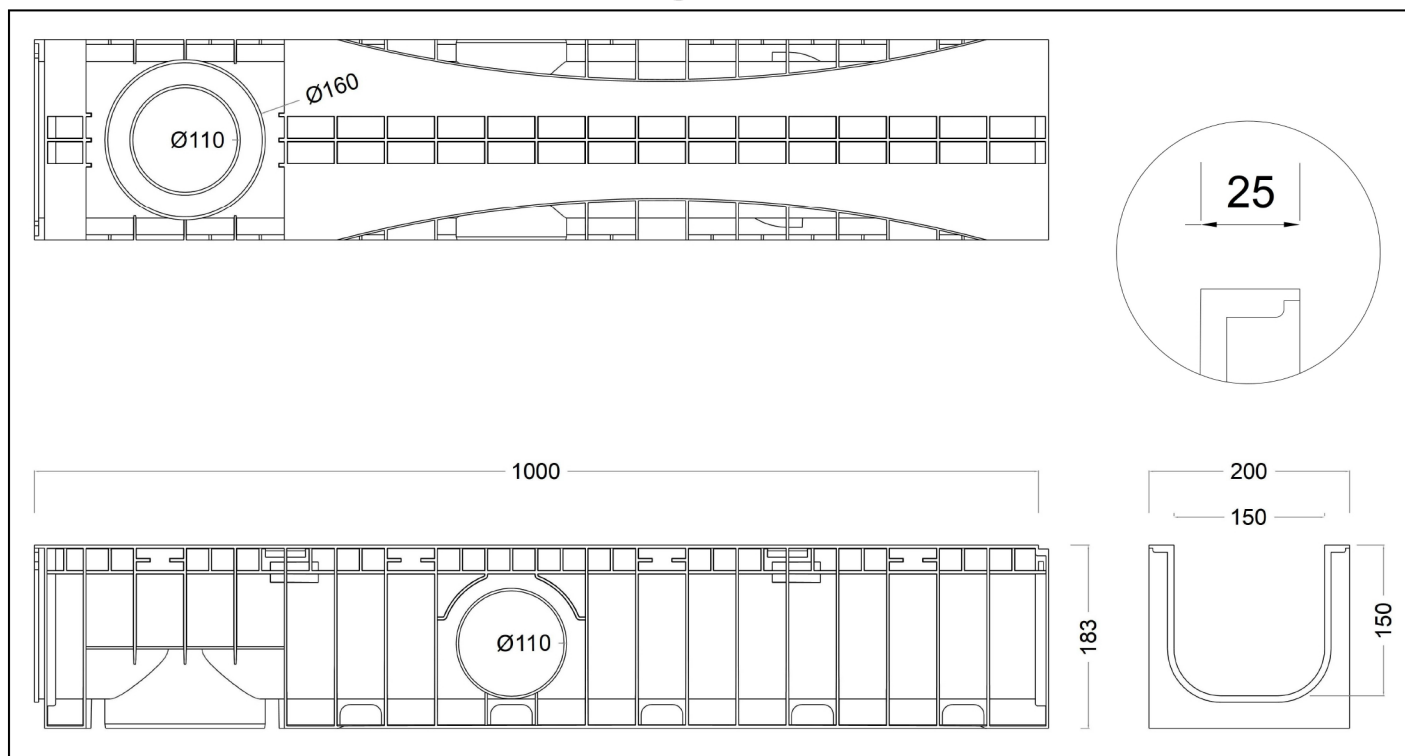

The connection between channels is made using a tongue and groove interlock and joint waterproofness is ensured by using a bituminous-based mastic. Alternatively, complete impermeability can be reached by heat welding the joint.

Dimensions and technical specifications - Type M EN1433

Overall Length / Overall Width (mm)	1000 / 200
Internal Height / Overall Height (mm)	150 / 183
Internal Width - clear opening (mm)	150
Depth of flat edges (mm)	25
Side / Vertical outlets (Ø mm)	2xØ110 - 1xØ110/160
Materials	HDPE Black
Channel weight (Kg)	3,0
Drainage section (cm ²)	215,6
Volume (dm ³)	21,56
Gratings fixing system	Fixing clips N. 2 bars per m.


N.B. Dimensions and weights are subject to normal manufacturing tolerances.

Compatible gratings EN1433 A15 ÷ C250

Code / model	Code / model
GRP150NZF / Galvanized slotted grating A15	GRGS150NMB / Ductile iron mesh grating B125
GRM150NQBZ / Galvanized mesh grating 30/30 B125	GRGS150NC / Ductile iron 10mm slot grating C250
GRM150NRBZ / Galvanized mesh grating 30/10 B125	



Galvanized slotted grating Neo 150 A15

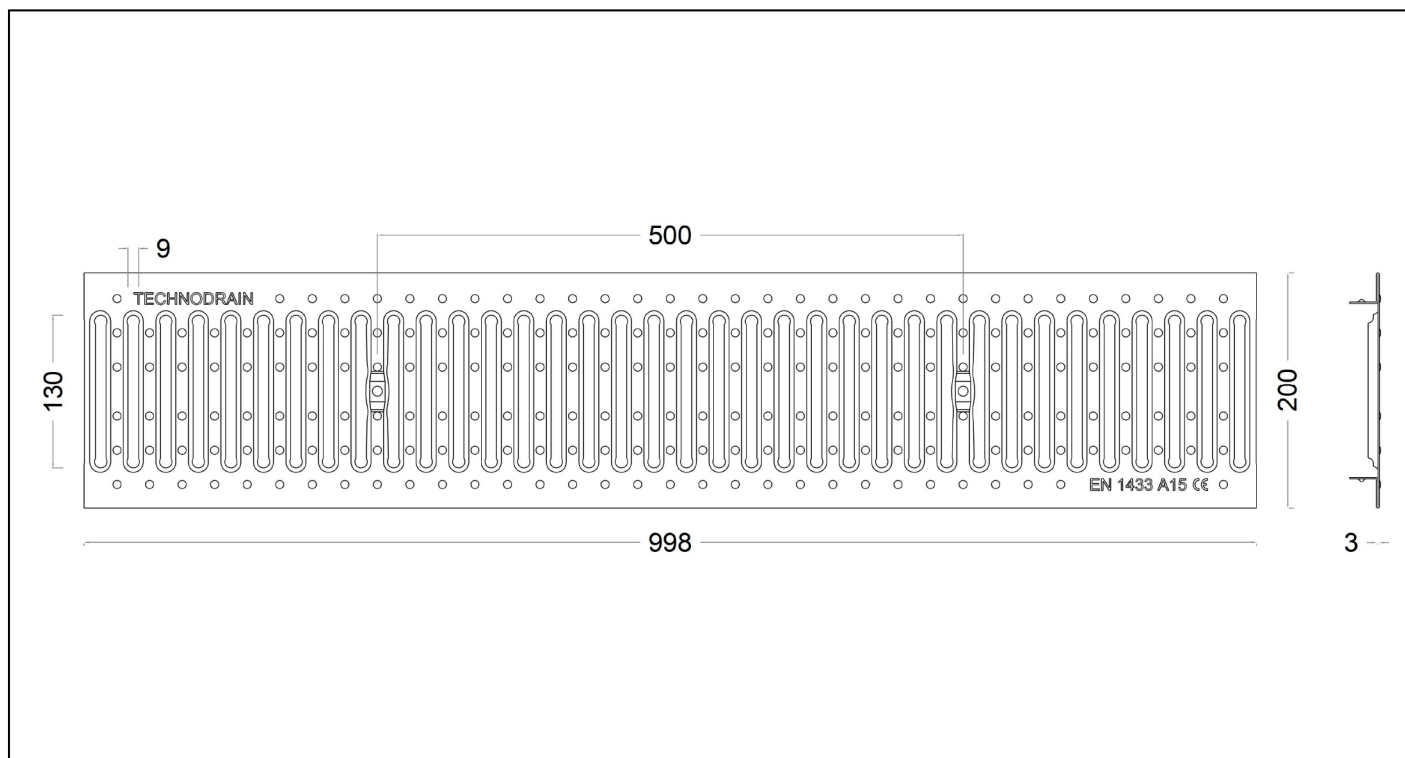

Dimensions and technical specifications

Lenght / Overall width (mm)	998 / 200
Height (mm)	3
Internal width (mm)	150
Material	Galvanized steel
Weight (Kg)	3
Slot size (mm)	130x9
Drainage area (cm ²)	
Fixing system	N. 2 tie bars per grating
Surface coating	Galvanized
Loading class (EN 1433)	A15

N.B. Dimensions and weights are subjected to normal manufacturing tolerances.

Compatible Technodrain channels

Code / model

CA150NS - Neo 150S (150/75)

CA150NH - Neo 150H (150/150)

